

Use of Nano-Sized Adsorbents for Wastewater Treatment: A Review

Sadaf Sarfraz^{1*}, Habib Ullah¹, Shomaila Sikandar², Aoun Raza¹

¹Department of Chemistry, ²Department of Biology, Lahore Garrison University, Lahore, Pakistan.

*Email: dr.sadafsarfraz@lgu.edu.pk

Received: 25 May, 2021

Accepted: 16 February, 2022

Abstract: There is an increased demand for high-quality drinking water, which requires the removal of hazardous contaminants emerging from municipal, agricultural, and industrial effluents. An approach towards safe drinking water requires the implementation of various treatment processes for water emerging from natural resources as well as coming in the form of industrial wastewater. Pollutants in water bodies may be present in multiple states, including large suspended particles, dissolved chemical substances, in the form of microorganisms or suspended solids. Over the last few years, researchers have concentrated on developing a practical methodology for extracting pollutants from wastewater. During the course of time, although many advanced and complex wastewater treatment processes have evolved, yet adsorption has its own importance. Owing to its simple operation process, low cost, and less sludge formation, adsorption is being considered the most promising technique for wastewater treatment. In this regard, nanomaterial adsorbents have become a topic of great interest owing to their exceptional properties such as high adsorption strength, greater surface area, and chemical stability. Keeping in view, key features of nanoparticles, researchers have explored the applications of various adsorbents at the nanoscale in addressing wastewater treatment issues. The present review focuses on the use of nano-adsorbents in treating various industrial effluents and also provides a comparative assay in terms of the advantages and drawbacks of these nano-adsorbents, employed in removing hazardous contaminants from industrial effluents.

Keywords: Wastewater, nanoparticles, adsorbents, polymer adsorbents.

Introduction

An existence of life without water is not possible on earth. It is the most fundamental asset for human and animal life. Drinking water is not safe for use without proper treatment and it is the most basic element of life. A considerable number of dangerous pollutants and waste is accumulated in freshwater bodies through various anthropogenic activities including an increased expulsion of poisonous materials containing heavy metals. This day-to-day increase in water pollution is dangerous to human wellbeing which needs a proper legitimate and financial-based treatment for removing harmful pollutants. Over the past few years, an increase in the urbanization of population demands a bigger measure of mechanical units to overcome the water scarcity issues. World Health Organization reported that around seven hundred and eighty million individuals have no access to shelter and clean drinking water (Tarras and Benjelloun, 2012). Keeping in mind this water scarcity issue, scientists have put forth a few strategies that ought to be considered quite effective for the treatment of wastewater to ensure a healthy life. Some of the conventional procedures reported in the literature for wastewater treatment includes tertiary treatment evaluation, season variability, nitrogen content variability, polysaccharide-based treatment etc. (Meneses et al., 2010, Crini, 2005). Nanotechnology plays a vital role in the treatment of wastewater bodies due to properties like high adsorption rates and enhanced surface activity. All these properties lie under the umbrella of Green Nanotechnology, which aims to lessen the ecological issues using safer methods. Adsorption via nanoparticles has a wide range of

applications in wastewater management owing to their extraordinary properties like large surface area which will help in agglomeration of the required material during the adsorption process. In this context, an assortment of nanoparticles adsorbents for treating wastewater bodies was put forward towards the end of the twentieth century. Dye is the primary hotspot for the increased water contamination emerging from the fabric industry, affecting water bodies by utilizing dissolved oxygen and ruining marine life. Magnetic nanoparticle adsorbents are mostly utilized for eliminating dye contents as reported in various literature (Gupta et al., 2015; Chen and Liao, 2002, Liao and Chen, 2002, Mak and Chen, 2004, Sheela et al., 2012, Tuutijärvi et al., 2009, Pieters, et al., 1992).

Apart from dyes, wastewater also contains hazardous heavy metals like arsenic, cadmium, antimony, zinc, nickel-chromium, and many others which may cause severe health disorders like cancer, asthma, etc. Nowadays, the main problem is to eliminate pollutants like heavy metals, herbicides, agrarian, and industrial waste from the water assets that are adversely affecting human life. Among various heavy metals, arsenic causes most water pollution making water dangerous for drinking and other activities. Majority of the countries using ground water are facing arsenic contamination in water reservoirs (Hua et al., 2012, Huang et al., 2011, Lin et al., 2011, Tuutijärvi et al., 2009).

Keeping in view the effectiveness of nano adsorbents, present review study comprises a detailed overview of various nano adsorbents employed for treating industrial effluents.

Carbon Nanotubes Adsorbents (CNTs)

For the removal of organic content from wastewater, carbon nanotubes are often used. Carbon nanotubes have unique properties like high porous structure, the large surface area, low density, and high interacting properties that could be used for the treatment of wastewater. Two types of carbon Nanotube are used for this purpose (Fig. 1). Due to its best adsorption sites found in the structure, carbon nanotubes show high surface activity resulting in increased percentage removal (Fig. 2). In wastewater containing Pb^{+2} as a major contaminant, carbon nanotubes provide high solute uptake speed which is the most unique and attractive feature of carbon nanotubes for its potential application for removal of lead ions. In one of the studies reported it has been found that the adsorption rate of Pb^{+2} ions increase instantly in the first ten minutes and with a linear increase in adsorption as time lapses. Some vital parameters of Pb^{+2} ions adsorbed on CNTs extracted from various studies have been summarized in Table I.

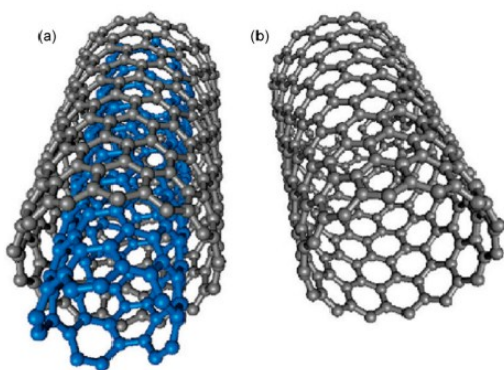


Fig. 1: (a) MWCNTs (b) SWCNTs (Structural representation)

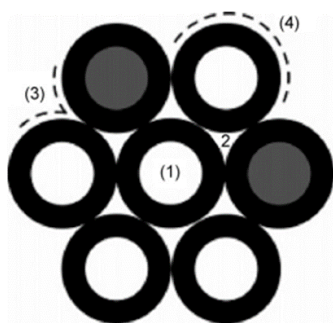


Fig. 2 The image of SWCNTs that have certain adsorption sites (1) represents the internal, (2) interstitial channel, (3) external groove site (4) and external surface (Ren et al., 2011)

Nanofiber Membranes as Adsorbent

Carbon nanofibers have a variety of specific characteristics such as organic dyes elimination due to C=O and OH groups working with CNFs, imparting them enhanced adsorption ability. Due to these specific features, carbon nanofiber possesses a rapid adsorption rate and high adsorption capacity leading to effective treatment of heavy metal assisted dyes such as

chromium, methylene blue, and lead. These properties impart mechanical strength to nanofiber membranes where filtration under pressure up to thirty-kilo Pascal is required (Liang et al., 2011). Literature reveals that most of these carbon nanofibers are synthesized by a directed hydrothermal carbonization process. Moreover, membrane pore size can easily be controlled from ten to a hundred nanometers during hydrothermal treatment. In this study, we have reported the effectiveness of different types of carbon nanofibers/membranes namely Carbon Nano Fiber CNF (50), CNF (100), and CNF (280) nm for treating wastewater bodies (Liang et al., 2011). It has been found that the Polyether-sulfone membrane is the most commonly used membrane for commercial purposes. However, the Nanofiber membrane is found much more advantageous over this commercially used membrane.

Clay-polymer Nanocomposites Adsorbents

Increased progress in nanocomposite polymers contributes to the development of fundamental characteristics and new technologies for their different applications in everyday life. The introduction of nanofillers is responsible for substantial improvements in the characteristics of polymer nanocomposites such as graphene, nano clay, metal oxides, carbon nanotubes, and double layered hydroxides (Azzam, 2014, Banks-Sills et al., 2016, Cailloux et al., 2016, Ensafi et al., 2014, Mallakpour and Barati, 2014, Mallakpour and Dinari, 2016, Mallakpour and Jarahiyan, 2016, Mallakpour and Javadpour, 2016, Mallakpour and Khani, 2015, Mallakpour and Khani, 2016, Mallakpour and Soltanian, 2016).

Over the past few years, engineers and scientists have shown keen interest in the use of new class of materials called polymer-clay nanocomposites (PCN) due to unique characteristics of heat deflection, high dimensional stabilization, gas barrier output, optical clarification, the permeability of reduced gas and flame retardance resulting in effective removal of pollutants from various industrial effluents (Agag and Takeichi, 2000, Fu and Qutubuddin, 2001, Galgali et al., 2001, Hasegawa et al., 1998, Huang et al., 2001, Kawasumi et al., 1997, Kojima et al., 1993, Lan et al., 2002, LeBaron et al., 1999, Manias et al., 2001, Messersmith and Giannelis, 1995, Okamoto et al., 2000, Tien and Wei, 2001, Usuki et al., 1993).

The use of PCN's to extract organic contaminants from water in recent years has been intensively carried out, because of lesser toxicity of clay, large surface area, rapid cation exchange mechanism, and low operational cost. Studies indicate that organic molecules' adsorption to the specific minerals is affected by exchangeable cations, existence of water molecules present among layers and spaces among clay mineral layers etc. (Mishra, 2014, Unuabonah and Taubert, 2014).

Lead is a toxic material, present in freshwater that could be removed by using a blend of polymer with iron oxide

nanoparticles to form polymer nanocomposites to increase efficiency (Gholami et al., 2014). Another nanocomposite named carboxymethyl cellulose with acrylic acid by grafting with silica gel is reported to have an adsorption capacity of 546 mg g⁻¹ and 781 mg g⁻¹ nearly equal to that of clay polymer nanocomposites used for the removal of crystal violet dye and cadmium (II) ions from wastewater (Saber-Samandari et al., 2016). Improved adsorption of Pb⁺² and methylene blue (MB) has been reported using monolithic rectorite /starch composites (PRs), giving adsorption capacity for lead (II) ion 180.8 mg g⁻¹ and for methylene blue (MB) 277.0 mg g⁻¹, respectively (Wang et al., 2015).

Iron oxide Nanoparticles Adsorbents

Iron oxide nanoparticles have also been reported in the literature for an effective removal of contaminants from water resources effectively. In one of the reported studies, it has been found that iron oxide has greater efficiency in the removal of lead ions showing an adsorption capacity of up to 36.0 mg g⁻¹. This seems to be less than the adsorption capacity as has been reported

the adsorption capacity of clay polymer nanocomposites for the removal of Cu (II) ions (Gong et al., 2012). Lunge et al. have reported the removal of arsenic (III) and arsenic (V) is carried out using magnetic iron oxide nanoparticles with tea waste having adsorption capacities as 188.69 mg g⁻¹ for arsenic (III) and 153.8 mg g⁻¹ for arsenic (V) (Lunge et al., 2014).

Zinc oxide Nanoparticles Adsorbents

ZnO nanoparticles have extensive use in paints, packaging, plastics, cosmetics and sunscreen formulation, and thus indirectly released into the environment. Studies indicate that ZnO nanocomposites serve as efficient adsorbents for the treatment of industrial wastewater. Water containing Zn (II), Cd (II) or Hg (II) ions can be removed more efficiently using ZnO nanoparticles. The literature reveals that ZnO nanoparticles are more efficient than silver, titania (TiO₂), and aluminium nanoparticles for wastewater treatment (Lombi et al., 2012). In one of the studies conducted by (Rafiq et al. 2014), it was found that ZnO nanoparticles show greater adsorption capacity which is

Table 1 A comparative assay of removal efficiency of various nano adsorbents in treating waste water effluent.

Nano adsorbent used	Contaminant	Removal efficiency	References	
Iron Oxide nanoparticles	Pb ⁺²	36.0	(Keshvardoostchokami et al., 2017; Xu et al., 2012)	
	Ni ions	58		
	Cr ions	202		
	ZnO Nanoparticles	Cu ions	48.99	(Gong et al., 2012)
		As (III)	188.69	(Lunge et al., 2014)
		As (V)	153.8	
ZnO Nanoparticles	Zn (II)	357	(Sheela et al., 2012)	
	Cd (II)	384		
	Hg (II)	714		
	Cu (II)	>1600		
Ag-Nanoparticles	crystal violet	87.20	(AbdEl-Salam et al., 2017)	
	Cu (II) ions	16.21	(Venkata et al., 2013)	
	Cd (II) ions	16.94		
Nickel Nanoparticles	Cr (VI)	4.73	(Behnajady and Bimeghdar, 2014)	
	As (III)	23.4	(Çiftçi and Henden2015)	
	As (V)	17.8		
monolithic rectorite/starch composites (PRs)	MB	277.0 mg g ⁻¹	(Wang et al., 2015)	
	Pb ⁺²	180.8 mg g ⁻¹		
MWCNTs	Cu (II)(l)	175 mg/g (For tap water)	(Tang et al., 2012)	
MWCNTs	Pb(II)(l)	~13.3 mg/g	(Shao et al., 2012)	
MWCNTs	Ni (II)(l)	49.261 mg/g	(Kandah and Meunier, 2007)	
SWCNTs	CO ₂ (g)	2 mg/g	(Long and Yang, 2001)	
CNFs	Hexane(g)	3.95 mmol/g	(Hsieh and Wen Chou, 2006)	
SWCNTs	Synthetic organic compounds(l)	66.6 mg/g	(Apul et al., 2013)	
MWCNTs	Atrazine(l)	18.83 mg/g	(Tang et al., 2012)	

for Clay Polymer Nanocomposites (Table 1). In one of the research works conducted by a group of workers, iron-oxide nanoparticles are combined with chitosan, resulting in adsorption capacity for Nickel up to 58 mg g⁻¹ and for Chromium up to 202 mg g⁻¹. (Keshvardoostchokami et al., 2017, Xu et al., 2012). In another study, pectin-coated iron-oxide magnetic nanocomposites have been reported as efficient adsorbents for copper ions from wastewater giving adsorption capacity up to 48.99 mg g⁻¹ following the pseudo-second order. This value seems to be less than

>1600 mg g⁻¹ for Cu (II) ions in wastewater (Rafiq et al., 2014). The maximum adsorption capacity shown by Zinc-oxide nanoparticles for Zn (II), Cd (II), and Hg (II) ions are 357 mg g⁻¹ for Zn (II), 384 mg g⁻¹ for Cd (II), and 714 mg g⁻¹ for Hg (II) ions (Sheela et al., 2012).

Silver Nanoparticle Adsorbents

For the removal of crystal violet dye and other pigments from wastewater bodies, studies reveal that Ag-nanoparticles serve as good candidates among the various classes of adsorbents. This is because in most of

silver-based adsorbents, the Ag-nanoparticles are immobilized on activated carbon, resulting in an effective increase in adsorption capacity for the removal of crystal violet from water. The adsorption capacity recorded for crystal violet is 87.20 mg g⁻¹. (AbdEl-Salam et al., 2017). In the case of Ag-nanoparticles deposited on multi-walled carbon nanotubes, the adsorption capacity was found to be 16.21 mg g⁻¹ for Cu (II) and 16.94 mg g⁻¹ for Cd (II) ions at 50 mg L⁻¹, respectively (Venkata et al. 2013).

Nickel Nanoparticles as Adsorbents

Chromium (VI) is one of the most hazardous heavy metals found in wastewater causing serious diseases like cancer etc. The adsorption capacity shown by mesoporous Ni-oxide nanoparticles to remove chromium (VI) is 4.73 mg g⁻¹. (Behnajady and Bimeghdar, 2014). For the removal of Arsenic (III) and Arsenic (V) from the wastewater most of the studies reported have used either nickel or nickel bromide nanoparticles showing adsorption capacity for Arsenic (III), 23.4 mg g⁻¹ and for Arsenic (V) 17.8 mg g⁻¹, respectively (Çiftçi and Henden, 2015). Table 1 gives an overall comparison of various nano adsorbents employed for treating wastewater.

Nevertheless, the extremely fine nature of NPS has greatly hampered its use in optimized-up water treatment because NPs faced some difficulties, such as propensity to combine, organizational complexity, and potential risk when unleashed into the environment (Zhao et al., 2011). A number of polymer-based nanocomposites have been developed in the last decade by encapsulation of inorganic nanoparticles (NPs) that are used inside the polymer host of porous nature to integrate NPS of high reactivity, and the host of bulky polymer is easy to operate (Bargar et al., 1997, Fan et al., 2005, Jang and Dempsey, 2008, Kawashima et al., 1986, Kinniburgh et al., 1976, Swallow et al., 1980, Trivedi et al., 2001).

Conclusion

It is concluded that wastewater is the main risk for human life that needs proper treatment. For this purpose, at an early stage, some traditional techniques were used. The literature utilized in the present review reveals that Nanoparticles have a wide range of adsorption properties like large surface area greater or larger adsorption capacity. The present study reveals that clay-based polymer nanocomposites are the best adsorbents for the treatment of wastewater owing to their wide range of adsorption capacity for almost all kinds of contaminants.

Acknowledgements

We are thankful to Dr. Shomaila Sikanadar for helping me write this review article. Thanks are also due to Habib Ullah and Aoun Raza for the support and contribution in formatting and editing of the paper.

References

- AbdEl-Salam, A. H., Ewais, H. A., & Basaleh, A. S. (2017). Silver nanoparticles immobilised on the activated carbon as efficient adsorbent for removal of crystal violet dye from aqueous solutions. A kinetic study. *J. Molec. Liq.*, **248**, 833-841.
- Agag, T., & Takeichi, T., (2000). Polybenzoxazine-montmorillonite hybrid nanocomposites: synthesis and characterization. *Polymer*, **41** (19), 7083-7090.
- Apul, O. G., Wang, Q., Zhou, Y., & Karanfil, T. (2013). Adsorption of aromatic organic contaminants by graphene nanosheets: Comparison with carbon nanotubes and activated carbon. *Water Res.*, **47** (4), 1648-1654.
- Azzam, W. R., (2014). Behavior of modified clay microstructure using polymer nanocomposites technique. *Alex. Eng. J.*, **53** (1), 143-150.
- Banks, L. S., Shiber, D. G., Fourman, V., & Eliasi, R., (2016). Experimental determination of mechanical properties of PMMA reinforced with functionalized CNTs, *Comp. B: Eng.*, **95**, 335-345.
- Bargar, J. R., Brown, G. E., & Parks, G. A., (1997). Surface complexation of Pb (II) at oxide-water interfaces: I. XAFS and bond-valence determination of mononuclear and polynuclear Pb (II) sorption products on aluminum oxides. *Geochim. Cosmochim. Acta*, **61**(13), 2617-2637.
- Behnajady, M. A., & Bimeghdar, S., (2014). Synthesis of mesoporous NiO nanoparticles and their application in the adsorption of Cr(VI), *Chem. Eng. J.*, **239**, 105-113.
- Caillox, J., Hakim, R. N., Santaana, O. O., & Bou, T. (2016). Reactive extrusion: A useful process to manufacture structurally modified PLA/o-MMT composites. *Comp. Part A, Applied Sci. and Manufac.*, **88**, 106-115.
- Chen, D. H., & Liao, M. H., (2002). Preparation and characterization of YADH-bound magnetic nanoparticles. *J. Mol. Catal. B: Enzym.*, **16** (5), 283-291.
- Çiftçi, T. D., & Henden, E., (2015). Nickel/nickel boride nanoparticles coated resin: A novel adsorbent for arsenic (III) and arsenic (V) removal. *Powd. Technol.*, **269**, 470-480.
- Crini, G., (2005). Recent developments in polysaccharide-based materials used as adsorbents in wastewater treatment. *Prog. Poly. Sci.*, **30** (1), 38-70.

- Ensafi, A., Esmail, H., Dinari, M., & Mallakpour, S. (2014). Improved immobilization of DNA to graphite surfaces, using amino acid modified clays. *J. Mat. Chem. B.*, **2** (20), 3022-3028.
- Fan, M., Boonfueng, T., Xu, Y., Axe, L., & Tyson, T. A., (2005). Modeling Pb sorption to microporous amorphous oxides as discrete particles and coatings. *J. Coll. Inter. Sci.*, **281**(1), 39-48.
- Fu, X., & Qutubuddin, S., (2001). Polymer–clay nanocomposites: exfoliation of organophilic montmorillonite nanolayers in polystyrene. *Polymer*, **42** (2), 807-813.
- Galgali. C, Ramesh, C., & Lele. A., (2001). A rheological study on the kinetics of hybrid formation in polypropylene nanocomposites. *Macromolecules*, **34** (4), 852-858.
- Gholami, A., Moghadassi, A. R., & Hosseini. S. M., (2014). Preparation and characterization of polyvinyl chloride based nanocomposite nanofiltration-membrane modified by iron oxide nanoparticles for lead removal from water. *J. Ind. Eng. Chem.*, **20**(4), 1517-1522.
- Gong, J. L., Wang, X. Y., Zeng, G. M., Chen. L., & Dheng, J. H. (2012). Copper (II) removal by pectin–iron oxide magnetic nanocomposite adsorbent. *Chem. Eng.*, **185-186**, 100-107.
- Gupta, V. K., Nayak, A., & Agarwal, S. (2015). Bioadsorbents for remediation of heavy metals: current status and their future prospects. *Environ. Eng. Res.*, **20** (1), 1-18.
- Hasegawa, N., Kawasumi, M., Kato, M., & Okada, A. (1998). Preparation and mechanical properties of polypropylene-clay hybrids using a maleic anhydride-modified polypropylene oligomer. *J. App. Poly. Sci.*, **67**(1), 87-92.
- Hua, M., Zhang, S., Pan, B., & Zhang, W., (2012). Heavy metal removal from water/wastewater by nanosized metal oxides: A review. *J. Hazard. Mat.*, **211-212**, 317-331.
- Huang, C. H., Chang, K. P., Ou, H. D., & Chiang, Y. C., (2011). Adsorption of cationic dyes onto mesoporous silica. *Micropor. Mesopor. Mater.*, **141** (11), 102-109.
- Huang, J. C., Zhu, Z., Yin, J., Qian, X., & Sun, Y. Y., (2001). Poly (etherimide)/montmorillonite nanocomposites prepared by melt intercalation: morphology, solvent resistance properties and thermal properties. *Polymer*, **42** (3), 873-877.
- Hsieh, C. T., & Wen Chou, Y. (2006). Fabrication and vapor- phase adsorption characterization of acetone and n- hexane onto carbon nanofibers. *Sep. Sci. Technol.*, **41** (14), 3155-3168.
- Jang, J. H., & Dempsey, B. A., (2008). Co-adsorption of arsenic (III) and arsenic (V) onto hydrous ferric oxide: effects on abiotic oxidation of arsenic (III), extraction efficiency, and model accuracy. *Env. Sci. Tech.*, **42** (8), 2893-2898.
- Kandah, M. I., & Meunier, J. L. (2007). Removal of nickel ions from water by multi-walled carbon nanotubes. *J. Haz. Mater.*, **146** (1), 283-288.
- Kawashima, M., Tainaka, Y., Hori, T., & Koyama, M., (1986). Phosphate adsorption onto hydrous manganese (IV) oxide in the presence of divalent cations. *Water Res.*, **20** (4), 471-475.
- Kawasumi, M., Hasegawa, N., Kato, M., & Usuki, A., (1997). Preparation and mechanical properties of polypropylene– clay hybrids. *Macromolecules*, **30** (20), 6333-6338.
- Keshvardoostchokami, M., Babaei, L., & Zamani, A. A., (2017). Synthesized chitosan/ iron oxide nanocomposite and shrimp shell in removal of nickel, cadmium and lead from aqueous solution. *Glob. J. Env. Sci.*, **3** (3), 267-278.
- Kinniburgh D. G., Jackson, M. L., & Syers. J. K., (1976). Adsorption of alkaline earth, transition, and heavy metal cations by hydrous oxide gels of iron and aluminum, *Soil Sci. Soc. Am. J.*, **40** (5), 796-799.
- Kojima, Y., Usuki, A., Kawasumi, M., & Okada, A., (1993). Mechanical properties of nylon 6-clay hybrid. *J. Mater. Res.*, **8** (5), 1185-1189.
- Lan, T., Kaviratna, P. D., & Pinnavia, T. J, (2002). Mechanism of clay tactoid exfoliation in epoxy-clay nanocomposites. *Chem. Mater.*, **7**(11), 2144-2150.
- LeBaron, P. C., Wang, Z., & Pinnavaia, T. J. (1999). Polymer-layered silicate nanocomposites: an overview. *Applied clay science*, **15**(1-2), 11-29.
- Liang H. W., Cao, X., & Zhang, W. J. (2011). Robust and Highly Efficient Free-Standing Carbonaceous Nanofiber Membranes for Water Purification, *Adv. Func. Mater.*, **21**(20), 3851-3858.
- Liao. M. H., & Chen, D. H., (2002). Preparation and characterization of a novel magnetic nano-adsorbent. *J.Mater. Chem.*, **12**(12), 3654-3659.
- Lin, Y. F., Chen, H. W., Chien, P. S., & Chiou, C. S., (2011). Application of bifunctional magnetic adsorbent to adsorb metal cations and anionic dyes in aqueous solution, *J. Hazard. Mater.* , **185**(2), 1124-1130.

- Lombi, E., Donner, E., Tavakoli, E., & Terence, W., (2012). Fate of Zinc Oxide Nanoparticles during Anaerobic Digestion of Wastewater and Post-Treatment Processing of Sewage Sludge. *Env. Sci. Tech.*, **46** (16), 9089-9096.
- Long, R. Q., & Yang, R. T. (2001). Carbon Nanotubes as a Superior Sorbent for Nitrogen Oxides. *Indust. Eng. Chem. Res.*, **40** (20), 4288-4291.
- Lunge, S., Singh, S., & Sinha, A., (2014). Magnetic iron oxide (Fe₃O₄) nanoparticles from tea waste for arsenic removal, *J. Mag. Magnetic Mater.*, **356**, 21-31.
- Mak, S. Y., & Chen, D. H., (2004). Fast adsorption of methylene blue on polyacrylic acid-bound iron oxide magnetic nanoparticles, *Dyes and Pigments*, **61**(1), 93-98.
- Mallakpour, S., & Barati, A., (2014). A straightforward preparation and characterization of novel poly (vinyl alcohol)/organoclay/silver tricomponent nanocomposite films. *Prog. Org. Coat.*, **77** (11), 1629-1634.
- Mallakpour, S., & Dinari, M., (2016). Bionanocomposite materials from layered double hydroxide/N-trimellitylimido-l-isoleucine hybrid and poly (vinyl alcohol) structural and morphological study. *J. Thermoplas. Compos. Mater.*, **29** (5), 623-637.
- Mallakpour, S., & Jarahiyan, A., (2016). An eco-friendly approach for the synthesis of biocompatible poly (vinyl alcohol) nanocomposite with aid of modified CuO nanoparticles with citric acid and vitamin C: mechanical, hermal and optical properties, *J. Iran. Chem. Soc.*, **13** (3), 509-518.
- Mallakpour, S., & Javadpour, M., (2016). An efficient preparation and characterization of nanocomposite films based on poly (vinyl chloride) and modified ZnO quantum dot with an optically active diacid containing amino acid as coupling agent. *Polym. Plast. Technol. Eng.*, **55** (5), 498-509.
- Mallakpour, S., & Khani, M., (2015). Composites of semiaromatic poly (amide-ester-imide) based on bioactive diacid and oragnomodified nanoclay produced by solution intercalation method: thermal and morphological study, *Polym. Plast. Technol. Eng.*, **54** (5), 541-547.
- Mallakpour, S., & Khani, M., (2016). Thermal and morphological studies of poly (vinyl alcohol)/poly (vinyl pyrrolidone)/organoclay nanocomposites containing L-leucine moiety, *Coll. Polym. Sci.*, **294**, (3), 583-590.
- Mallakpour, S., & Soltanian, S., (2016). Chemical surface coating of MWCNT s with riboflavin and its application for the production of poly (ester-imide)/MWCNT s composites containing 4, 4'-thiobis (2-tert-butyl-5-methylphenol) linkages: Thermal and morphological properties. *J. App. Poly. Sci.*, **133**(4), 1-9.
- Manias, E., Touny, A., wu, L., & Strawhecker, K., (2001). Polypropylene/montmorillonite nanocomposites. Review of the synthetic routes and materials properties. *Chem. of Mater.*, **13**(10): 3516-3523.
- Meneses, M., Pasqualino, J. C., & Castells, F., (2010). Environmental assessment of urban wastewater reuse: Treatment alternatives and applications. *Chemosphere*, **81**(2), 266-272.
- Messersmith, P. B., & Giannelis, E. P., (1995). Synthesis and barrier properties of poly (ε-caprolactone)-layered silicate nanocomposites. *J. Polym. Sci. A: Polym. Chem.*, **33**(7), 1047-1057.
- Mishra, A. K., (2014). Nanocomposites in wastewater treatment. Jenny Stanford Publishing.
- Musty, P. R., & Nickless, G., (1974). Use of Amberlite XAD-4 for extraction and recovery of chlorinated insecticides and polychlorinated biphenyls from water. *J. Chrom. A.*, **89**(2): 185-190.
- Okamoto, M., Morita, S., & Kotaka, T., (2000). Synthesis and structure of smectic clay/poly (methyl methacrylate) and clay/polystyrene nanocomposites via in situ intercalative polymerization. *Polymer* **41**(10), 3887-3890.
- Pieters, B., Bardeletti, G., & Coglet, P. (1992). Glucoamylase immobilization on a magnetic microparticle for the continuous hydrolysis of maltodextrin in a fluidized bed reactor. *Appl. Biochem. Biotechnol.*, **32**(1), 37-53.
- Rafiq, Z., Nazir, R., Shah, M. R., & Ali, S. (2014). Utilization of magnesium and zinc oxide nano-adsorbents as potential materials for treatment of copper electroplating industry wastewater. *Journal of Environmental Chemical Engineering*, **2**(1), 642-651.
- Ren, X., Chen, C., Nagatsu, M., & Wang, X. (2011). Carbon nanotubes as adsorbents in environmental pollution management: A review. *Chem. Eng. J.*, **170** (2), 395-410.
- Saber, S., (2016). Novel carboxymethyl cellulose based nanocomposite membrane: Synthesis, characterization and application in water treatment. *J. Env. Manag.*, **166**, 457-465.

- Shao, D., Chen, C., & Wang, X. (2012). Application of polyaniline and multiwalled carbon nanotube magnetic composites for removal of Pb(II). *Chem. Eng. J.*, **185-186**, 144-150.
- Sheela, T., Nayaka, Y. A., Viswanatha, R., & Basavanna. S., (2012). Kinetics and thermodynamics studies on the adsorption of Zn (II), Cd (II) and Hg (II) from aqueous solution using zinc oxide nanoparticles. *Powd. Technol.*, **217**,163-170.
- Swallow, K. C., Hume, D. C., & Morel, F. M., (1980). Sorption of copper and lead by hydrous ferric oxide. *Envi. Sci. Technol.*, **14** (11), 1326-1331.
- Tang, W.-W., Zeng, G.-M., Gong, J.-L., Liu, Y., Wang, X.-Y., Liu, Y.-Y., & Tu, D.-Z. (2012). Simultaneous adsorption of atrazine and Cu (II) from wastewater by magnetic multi-walled carbon nanotube. *Chem. Eng. J.*, **211-212**, 470-478.
- Tarrass, F., & Benjelloun, M. (2012). The effects of water shortages on health and human development. *Perspect. Public Health*, **132** (5), 240-244.
- Tien, Y. I., & Wei, K. H., (2001). Hydrogen bonding and mechanical properties in segmented montmorillonite/polyurethane nanocomposites of different hard segment ratios. *Polymer*, **42** (7), 3213-3221.
- Trivedi, P., Axe, L., & Tyson, T. A., (2001). XAS studies of Ni and Zn sorbed to hydrous manganese oxide. *Env. Sci. Technol.*, **35** (22), 4515-4521.
- Tuutijärvi, T., Lu, J., Sillanpaa, M., & Chen. G., (2009). As (V) adsorption on magnetite nanoparticles. *J. Hazard. Mater.* , **166** (2), 1415-1420.
- Unuabonah, E. I., & Taubert, A., (2014). Clay-polymer nanocomposites (CPNs): Adsorbents of the future for water treatment. *Appl. Clay Sci.*, **99**, 83-92.
- Usuki, A., Kawasumi, M., Kojima, Y., & Okada, A., (1993). Swelling behavior of montmorillonite cation exchanged for ω -amino acids by ϵ -caprolactam. *J. Mater. Res.*, **8**(5), 1174-1178.
- Venkata, Ramana, D. K., Yu, J. S., & Sessaiah, K. (2013). Silver nanoparticles deposited multiwalled carbon nanotubes for removal of Cu(II) and Cd(II) from water: Surface, kinetic, equilibrium, and thermal adsorption properties. *Chem. Eng. J.*, **223**, 806-815.
- Wang, F., Chang, P. R., Zheng, P., & Ma, X., (2015). Monolithic porous rectorite/starch composites: fabrication, modification and adsorption. *Appl. Surf. Sci.*, **349**, 251-258.
- Xu, P., Zeng, G. M., Huang, D. L., Feng, C. L., Hu, S., et al., 2012. Use of iron oxide nanomaterials in wastewater treatment: A review. *Sci. Total Env.* , **424**, 1-10.
- Xu, P., Zeng, G.M., Huang, D.L., Feng, C.L., Hu, S., Zhao, M.H., Lai, C., Wei, Z., Huang, C., Xie, G.X. & Liu, Z.F., (2012). Use of iron oxide nanomaterials in wastewater treatment: a review. *Science of the Total Environment*, **424**, 1-10.
- Zhao, X., Lv, L., Pan, B., Zhang, W., & Zhang, S., (2011). Polymer-supported nanocomposites for environmental application: a review. *Chem. Eng. J.*, **170**(2-3), 381-394.



This work is licensed under a [Creative Commons Attribution-NonCommercial 4.0 International License](https://creativecommons.org/licenses/by-nc/4.0/).